

FIG. 1B  
(PRIOR ART)

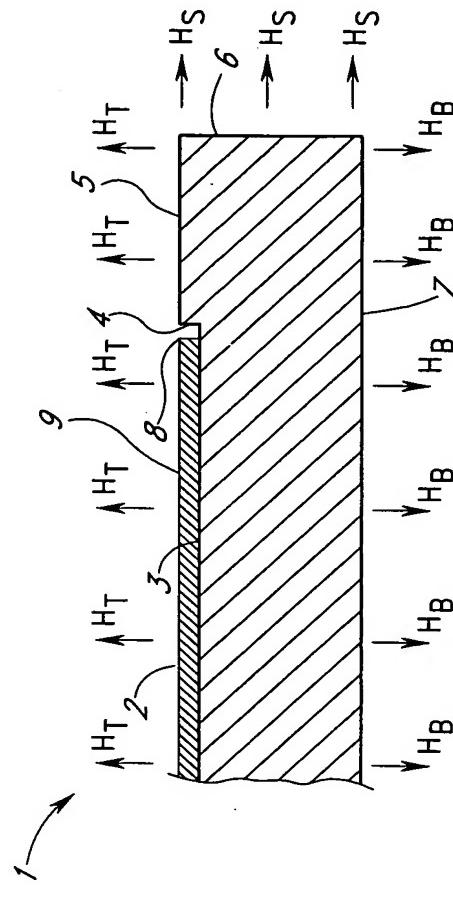


FIG. 1C  
(PRIOR ART)

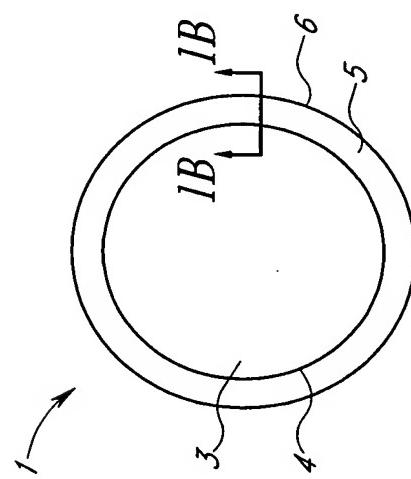


FIG. 1A  
(PRIOR ART)

2/7

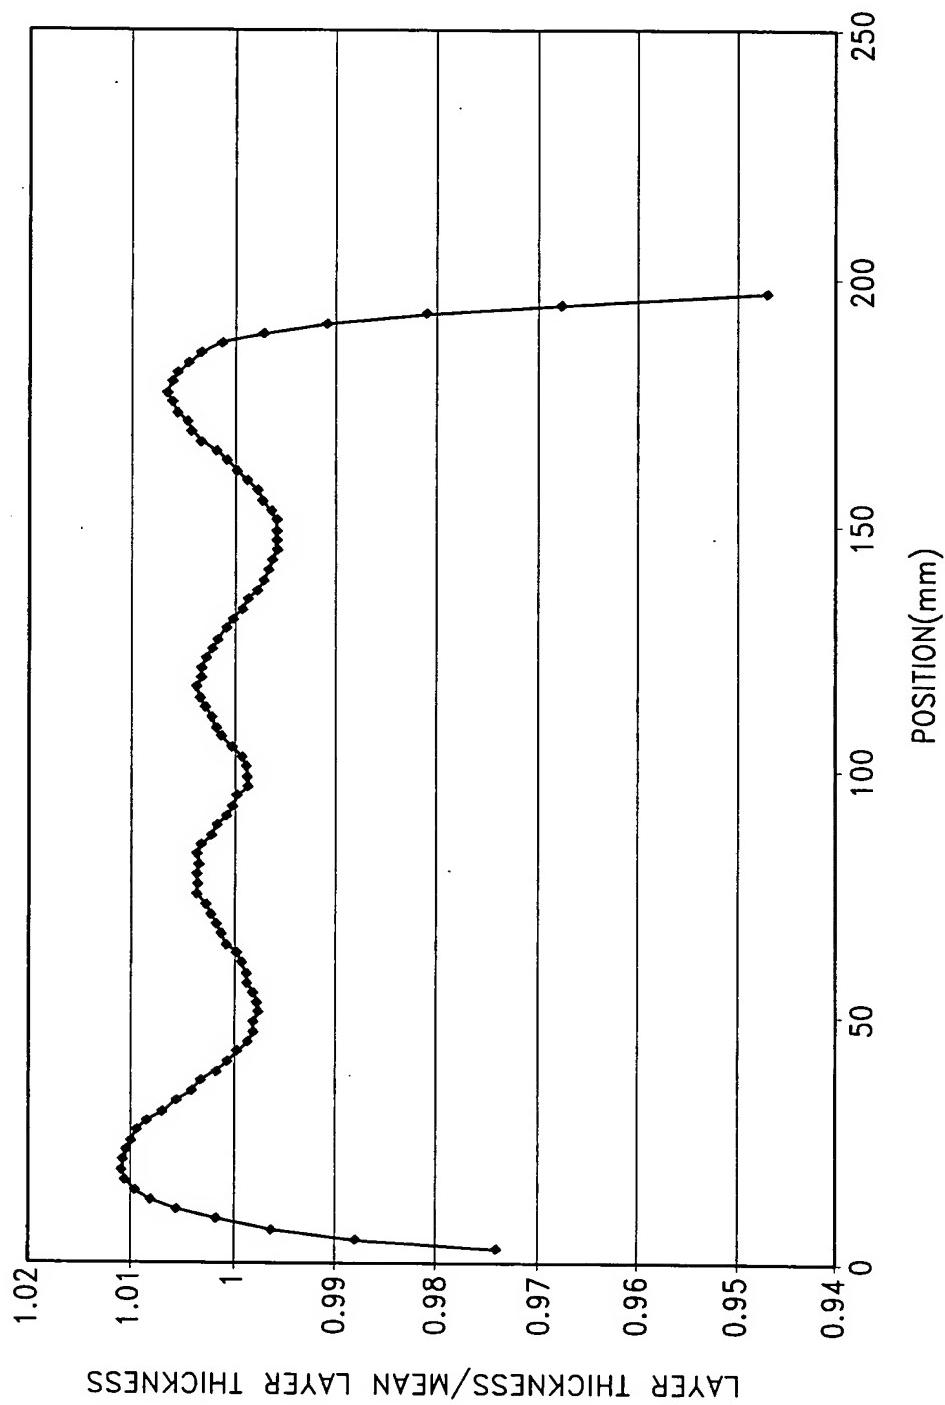


FIG. 1D  
(PRIOR ART)

3 / 7

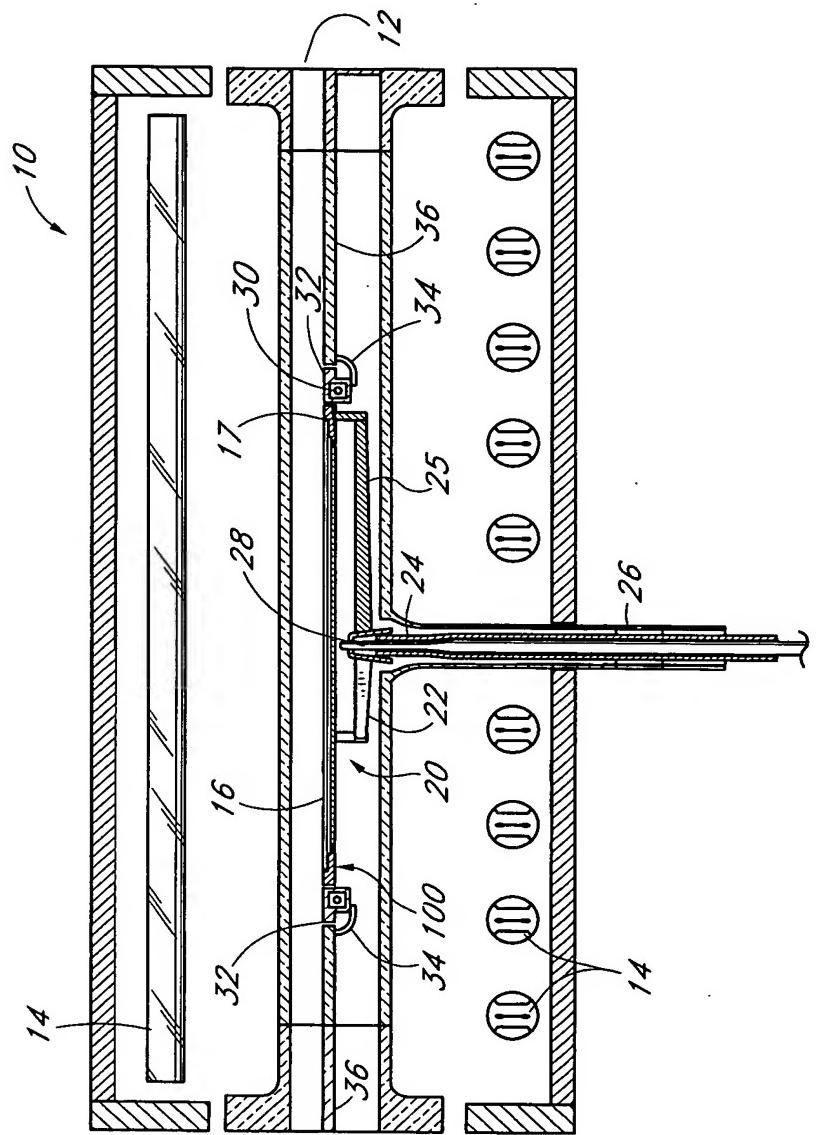


FIG. 2

4/7

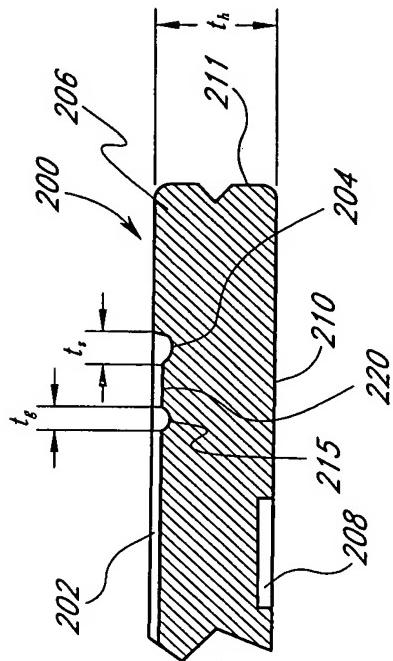


FIG. 3B

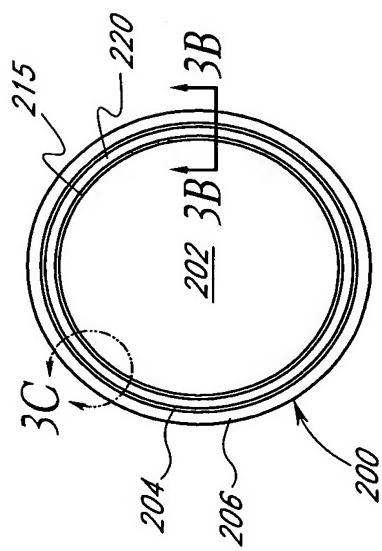


FIG. 3A

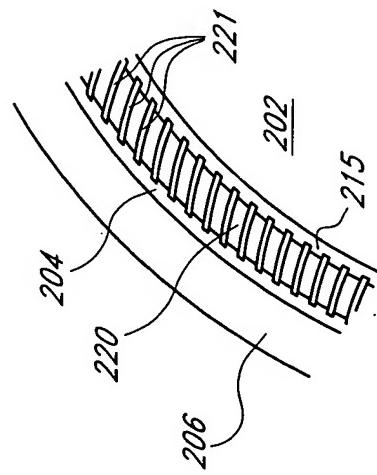


FIG. 3C

5/7

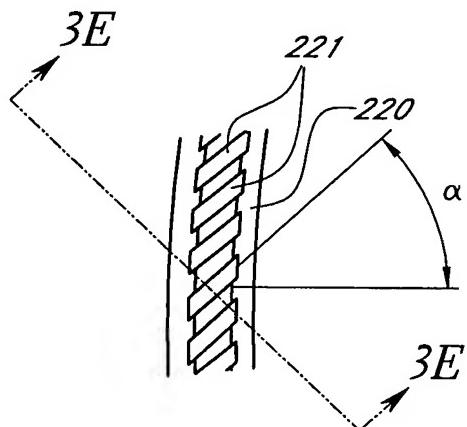


FIG. 3D

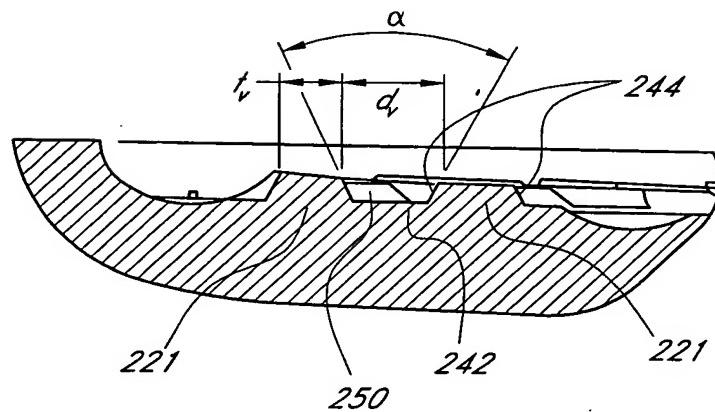


FIG. 3E

6 / 7

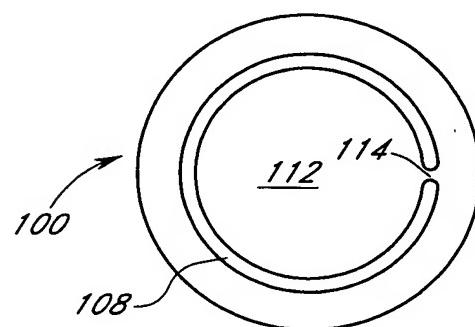


FIG. 4

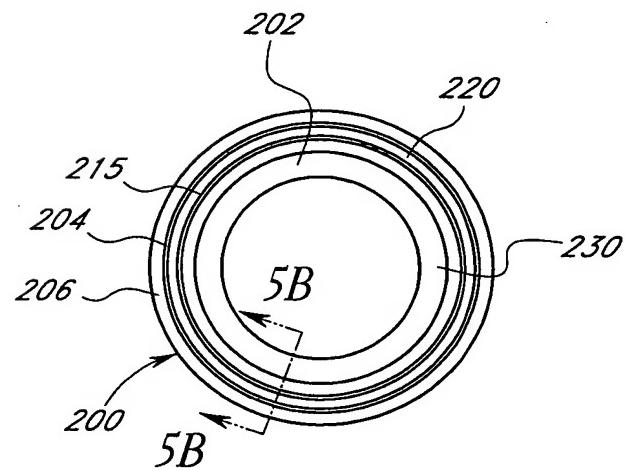



FIG. 5A

*LOW/HIGH TEMPERATURE SUBSTRATE HOLDER TO REDUCE EDGE ROLLOFF AND BACKSIDE DAMAGE*

*Keeton et al.*

*Appl. No.: 10/697,401 Atty Docket: ASMEX.419A*

7/7

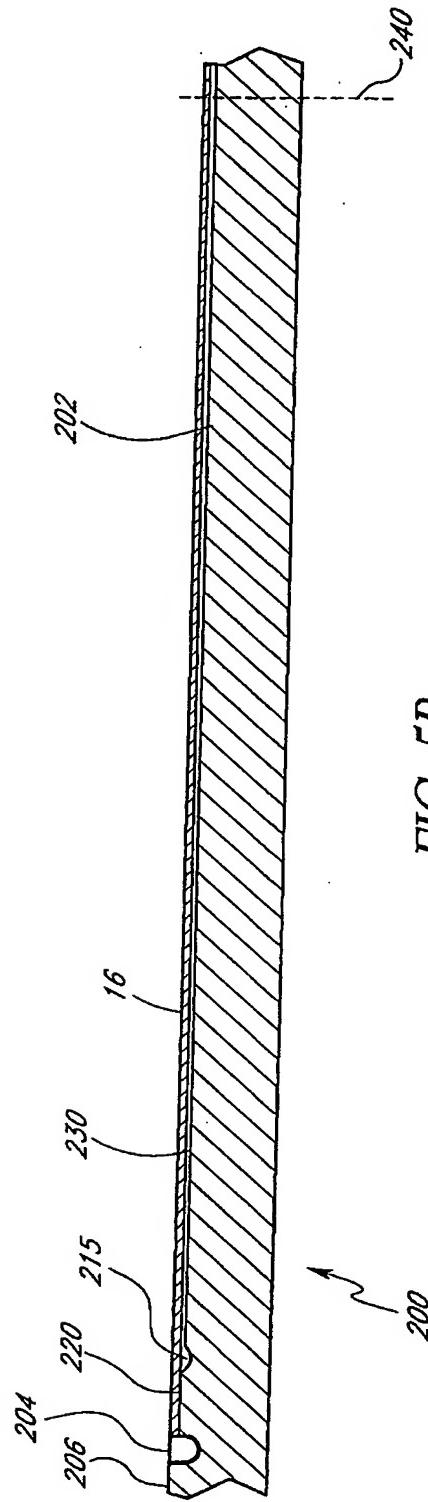

*FIG. 5B*